

INSTRUCTIONS

Thermostatically operated valve


Type AVTA - TCV

Special version for Edwards, UK



003R9306


003R9306

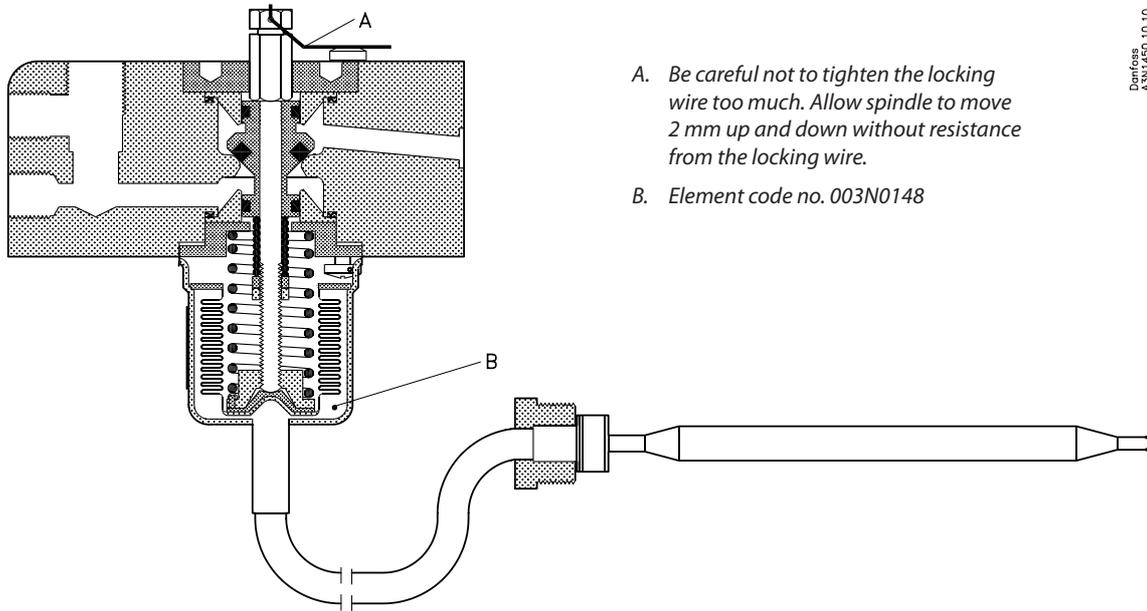

- A. Be careful not to tighten the locking wire too much. Allow spindle to move 2 mm up and down without resistance from the locking wire.
- B. Element code no. 003N0148

Danfoss
ASN1450.10.10

Max. water pressure	10 bar
Max. differential pressure	10 bar
K _v value	1 m ³ /h at differential pressure
Setting range	+50 °C - +90 °C
Set point	12.75 turns from positive dead stop fully closed valve
Adjustment	one full (360°) turn = approximately 2.75 °C (sensor temperature)

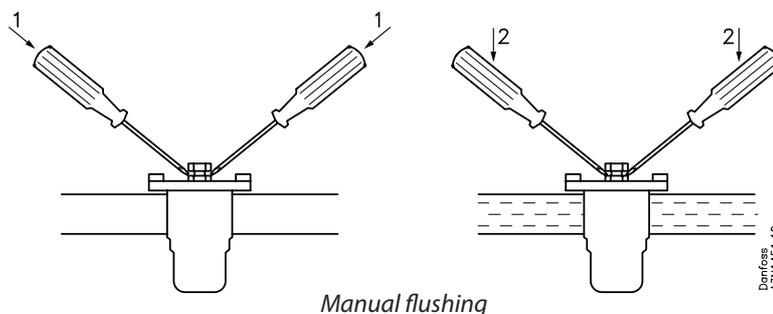

Manual flushing

Danfoss
ASN1450.10