

1 2 3 4 5 6 7 8

A

B

C

D

E


F

A

B


C

D

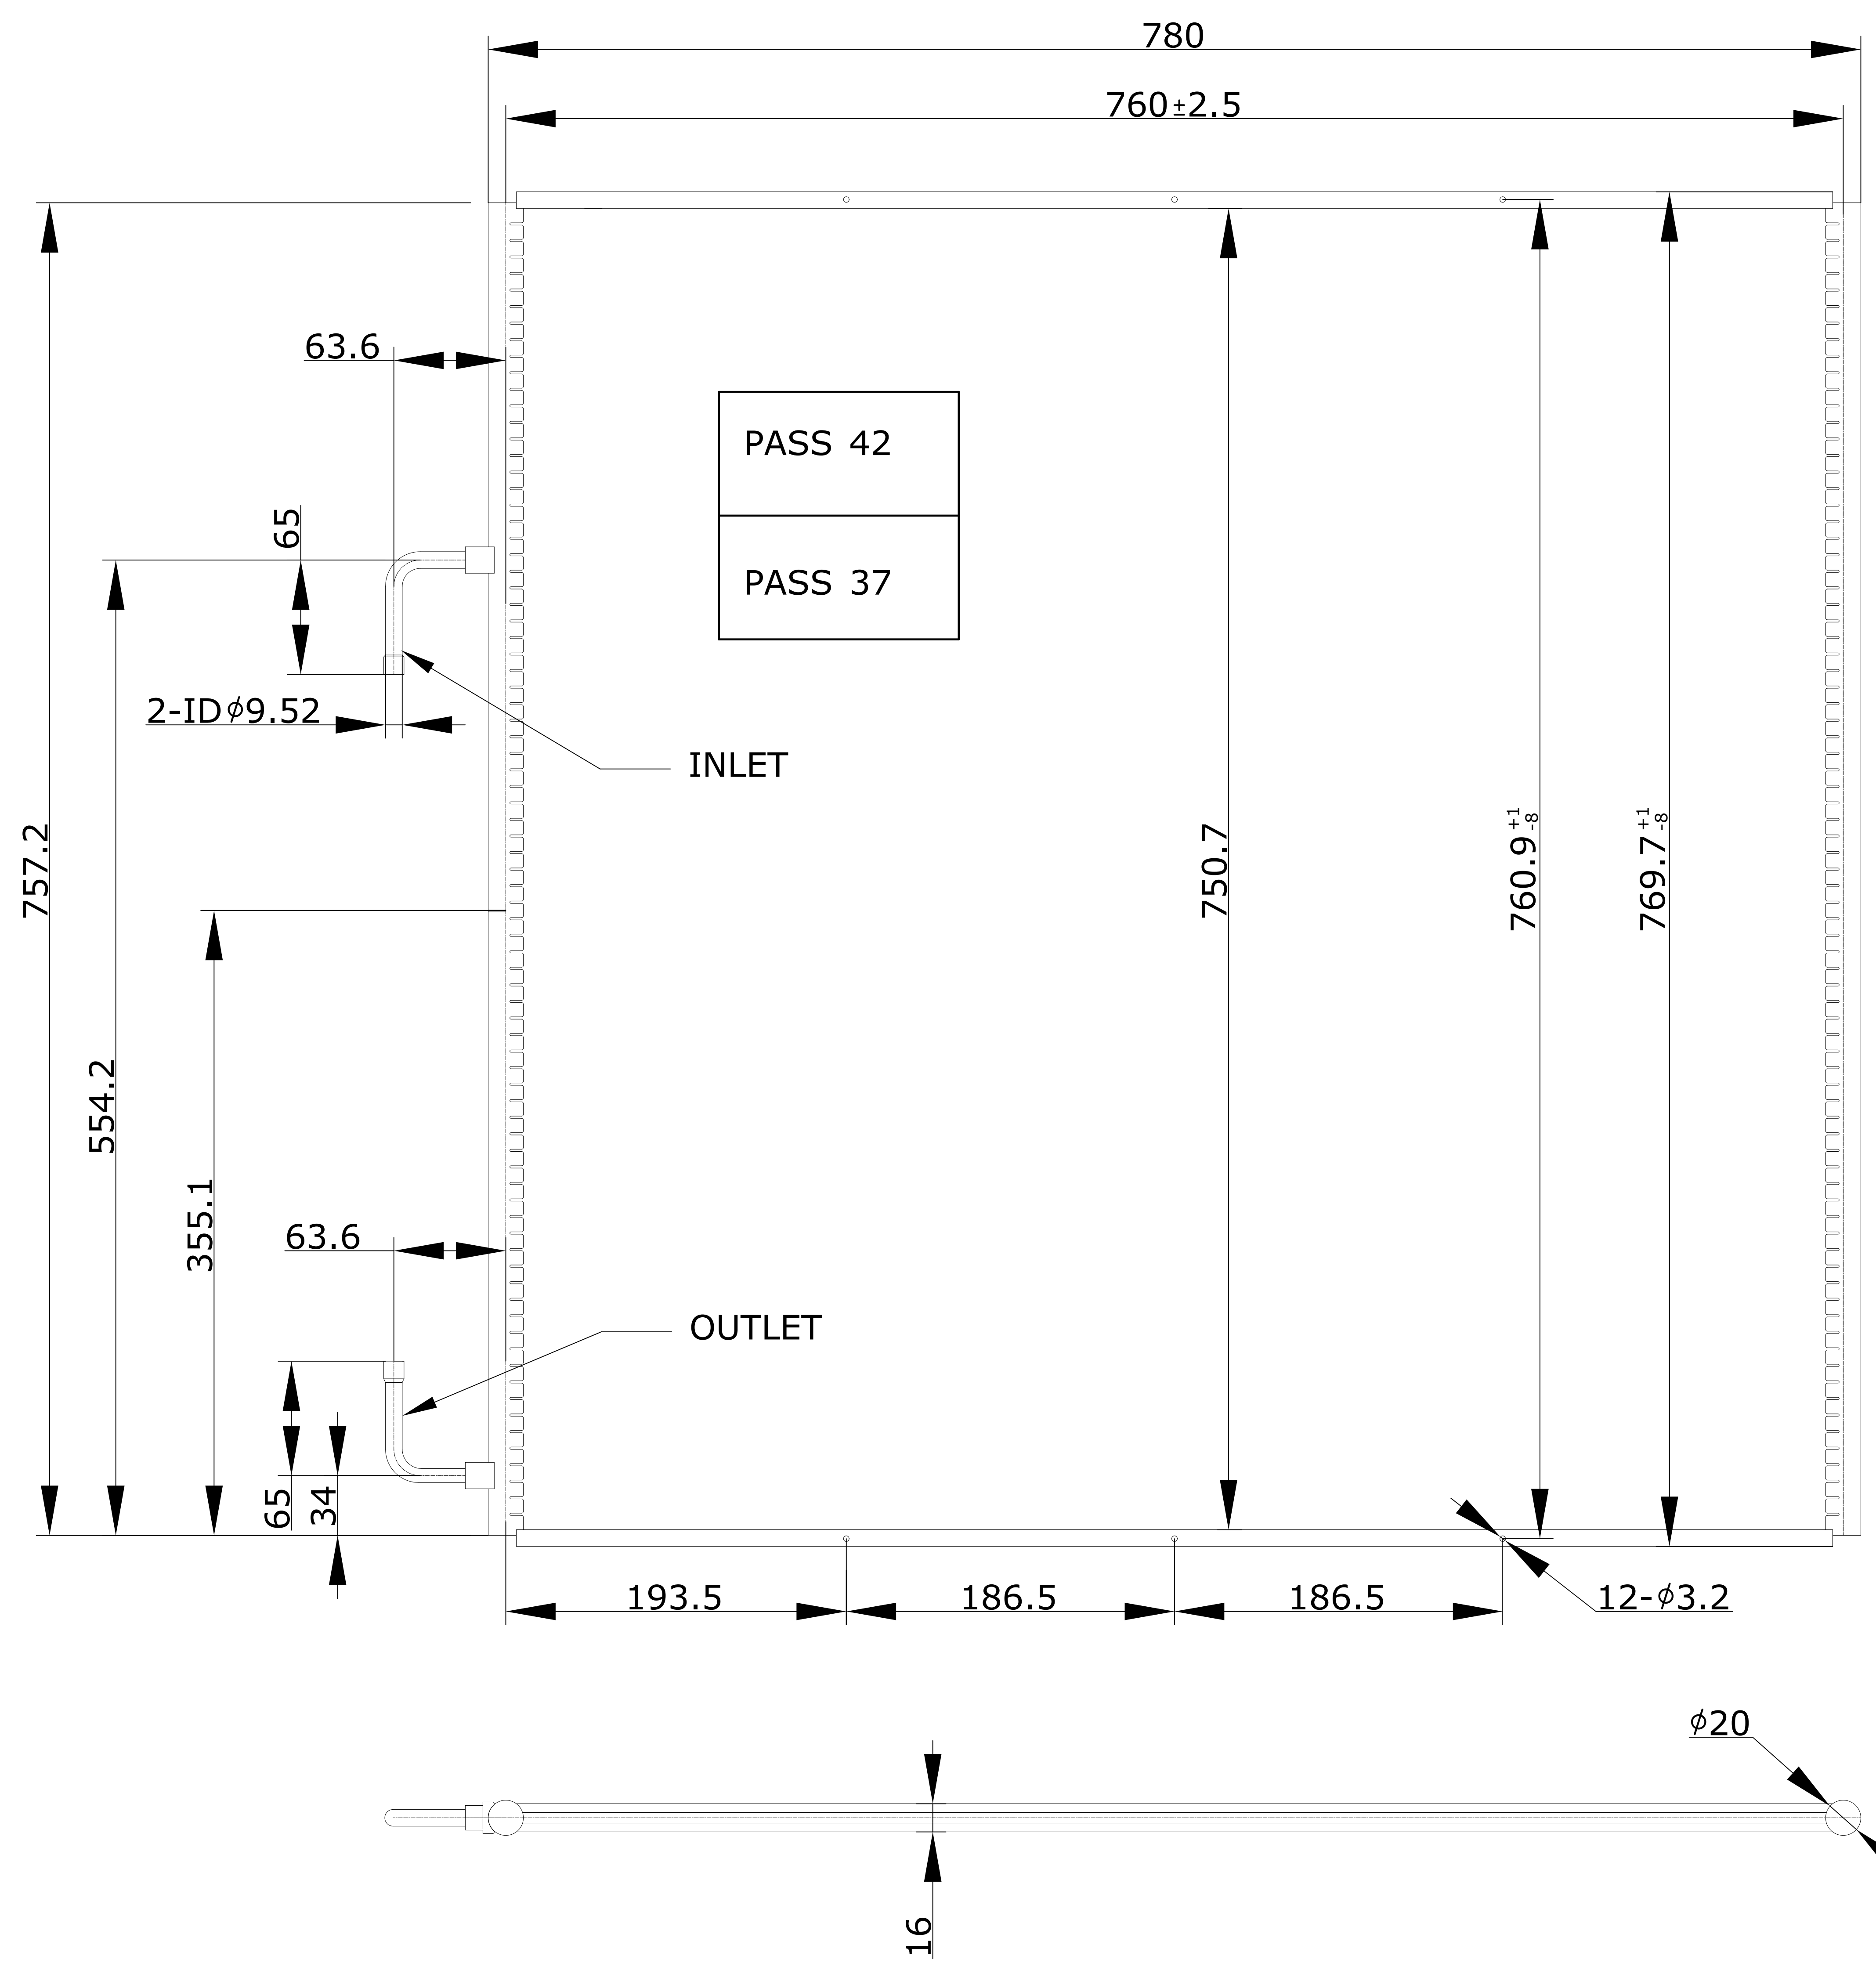

Unspecified linear dimension tolerance (mm)							
Tolerance class	Basic size						
	0.5~3	3~6	6~30	30~120	120~400	400~1000	1000~2000
f	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	
m	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	
c	±0.2	±0.3	±0.5	±0.8	±1.2	±2	

ISO 2768-1 CLASS C(GB/T 1804 CLASS C)

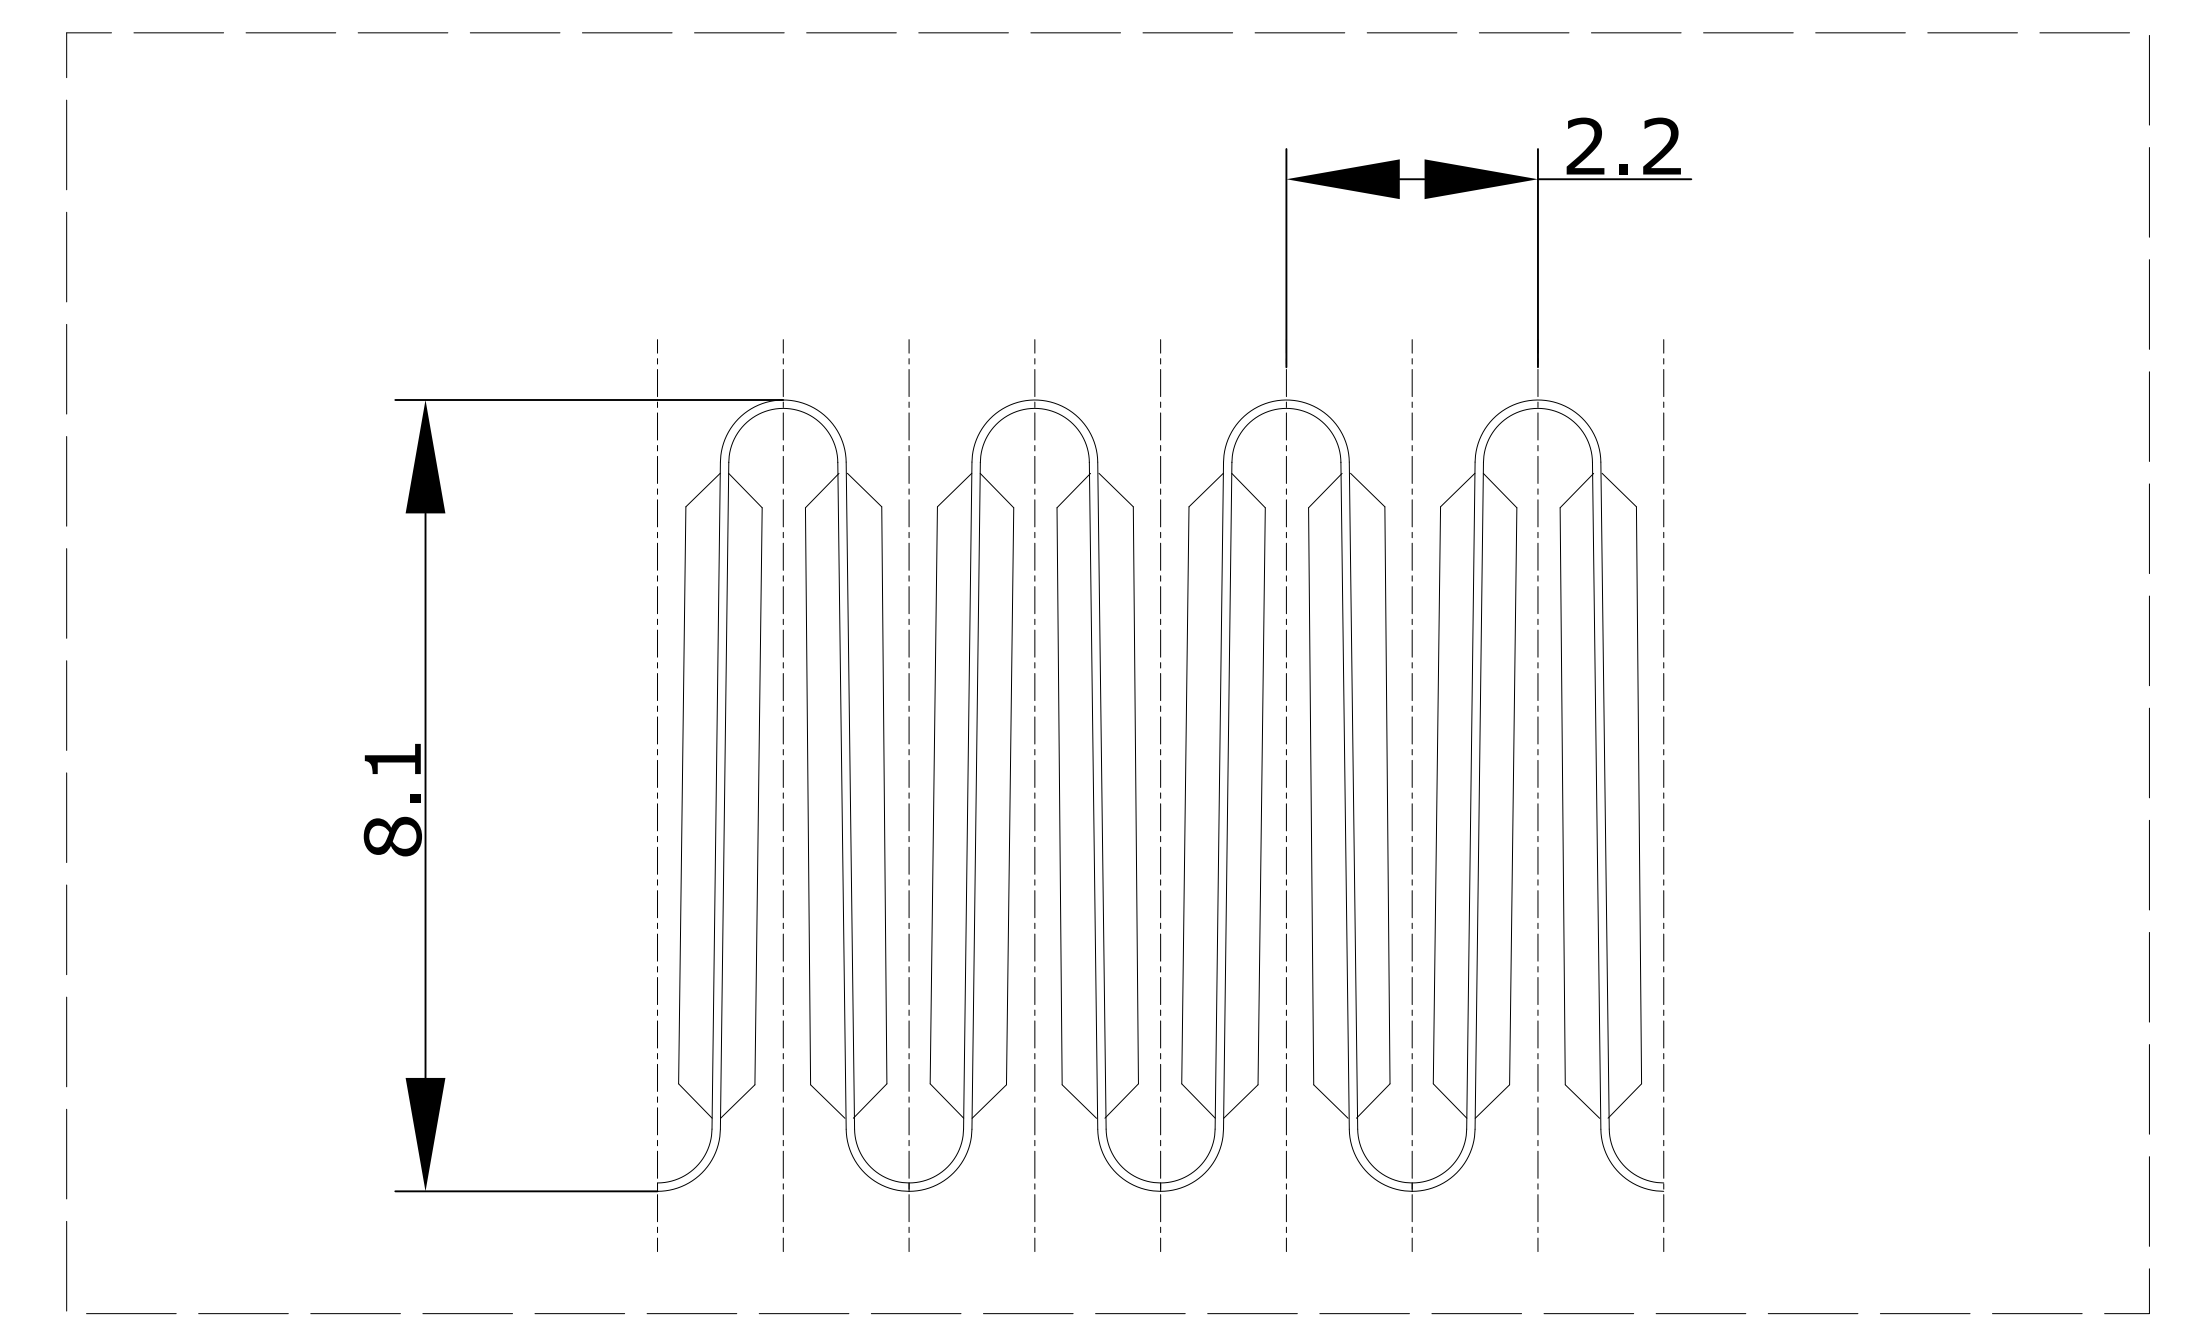

NOTES
 1 DESIGN PRESSURE 4.5MPA;
 2 THE MINIMUM BURST PRESSURE OF THE PRODUCT IS THREE TIMES THE DESIGN PRESSURE
 3 DIAGONAL DIFFERENCE MAX 7mm;
 4 TOLERANCE IF NOT SPECIFIED SHALL COMPLY WITH STANDARD ISO 2768-1 CLASS C(GB/T 1804 CLASS C)
 5 SEAL 0.01~0.05MPA NITROGEN GAS IN THE PRODUCT
 6 OTHER STANDARDS JB/T11967 EN378-2.
 7 THE INLET AND OUTLET PIPES ARE COPPER PIPES

PRODUCT PARAMETERS
 TUBE NUMBER 79
 TUBE TYPE 16*1.3-16
 TUBE MATERIAL LLA9153(3F03)+Zn- H112
 MANIFOLD TYPE φ20
 FIN TYPE LOUVERED 16*0.08 FPI 23
 FIN MATERIAL AA4343/3003/4343
 PASS 42/37

Change log

	Modify content



DESCRIPTIN:
Microchannel heat exchanger

MODEL: RC-1400-S REV. C

VIEW: CODE: 021U0084R CREAT:
AUDIT:

APPROVED BY CUSTOMER SIGNATURE: PROCESS:
APPROVE:

1 2 3 4 5 6 7 8